



General Purpose Castors

**SANO Series**

**Nylon Framed Castors with Rubber Wheels and Precision Ball Bearings**

Swivel castors with nylon + glass fibre frames and natural rubber wheels.  
Maximum load capacity tested according to BS EN 12530:1999 requirements.

Fixing System	Rectangular top plate
Frame	Nylon + glass fibre
Wheel Tread	Natural rubber
Wheel Bearing Type	Precision ball bearings
Brake / Stopper	Total brake (SIJB type castors)



Edly SIJ-100-P and SIJ-127-P have achieved 53,77% of Domestic Component Level from Indonesian Ministry of Industry



Edly SIJB-100-P and SIJB-127-P have achieved 54,94% of Domestic Component Level from Indonesian Ministry of Industry



Picture may differ from actual product

## Features



Natural rubber treaded wheel, supported by precision ball bearings.  
Silent wheel revolution with soft tread surface (Shore A 60±2,5).  
With special rubber compound that leaves no mark / stain on the floor.




Foot actuated total brake (SIJB type castors)




Swivel axle supported by precision ball bearing that is larger than most castors in its class


## Technical Information

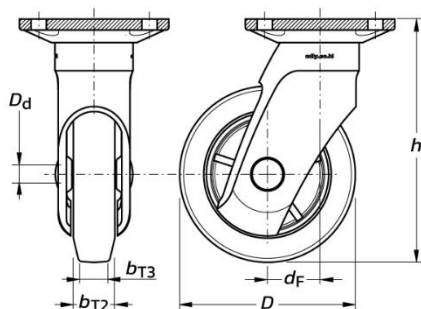

SIJ-100-P & SIJ-127-P Swivel Castors

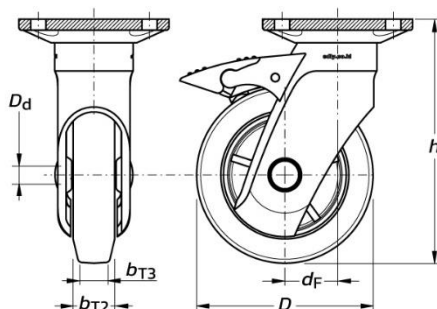

SIJB-100-P & SIJB-127-P Swivel Castors with Total Brake

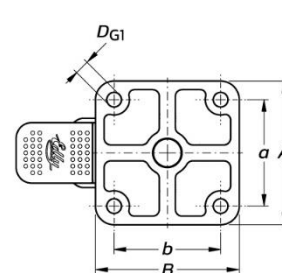

Rectangular Top Plate Fixing

Order Code	Load Capacity (kg)	Dimensions (unless stated otherwise, dimensions are in millimetres)											Physical Mass (in grams)	
		A	B	a	b	D <sub>G1</sub>	D	h	d <sub>F</sub>	b <sub>T2</sub>	b <sub>T3</sub>	D <sub>d</sub>		Swept Radius
SIJ-100-P	50	96	96	72	72	9	100	142,5	46	26	16	8	96	510
SIJB-100-P*	50	96	96	72	72	9	100	142,5	46	26	16	8	114,2	550
SIJ-127-P	80	108	108	80	80	11	127	177,5	38	30	21	8	101,5	775
SIJB-127-P*	80	108	108	80	80	11	127	177,5	38	30	21	8	114,2	855

Technical information and dimensions provided above are subject to tolerances

\* Swivel castors equipped with wheel brake